

1Port RJ45 Connector

E115JA01A-GY



ELECTRICAL:


1.VOLTAGE RATING:	125VAC RMS
2.CURRENT RATING:	1.5 AMP
3.CONTACT RESISTANCE	30 MILLIOHMS MAX
4.INSULATION RESISTANCE	500 MEGOHMS MIN @ 500 VDC
5.DIELECTRIC STRENGTH	1000VAC RMS 50HZ OR 60HZ 1MIN

MECHANICAL:

1.HOUSING & INSERT MATERIAL	IPBT UL94V-0
2.CONTACT MATERIAL	DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL
3.SHIELD	0.20~0.25MM THICKNESS BRASS WITH TIN PLATE
4.MATING/UNMATING FORCE	2.2KG.F MAX
5.RETENTION STRENGTH	7.7KG.F MIN BETWEEN JACK AND PLUG
6.OPERATING LIFE	600 CYCLES MIN

ENVIRONMENTAL:

1. STORAGE	-10°C~+40°C RELATIVE HUMIDITY <70%
2.OPERATION	-40°C~+70°C

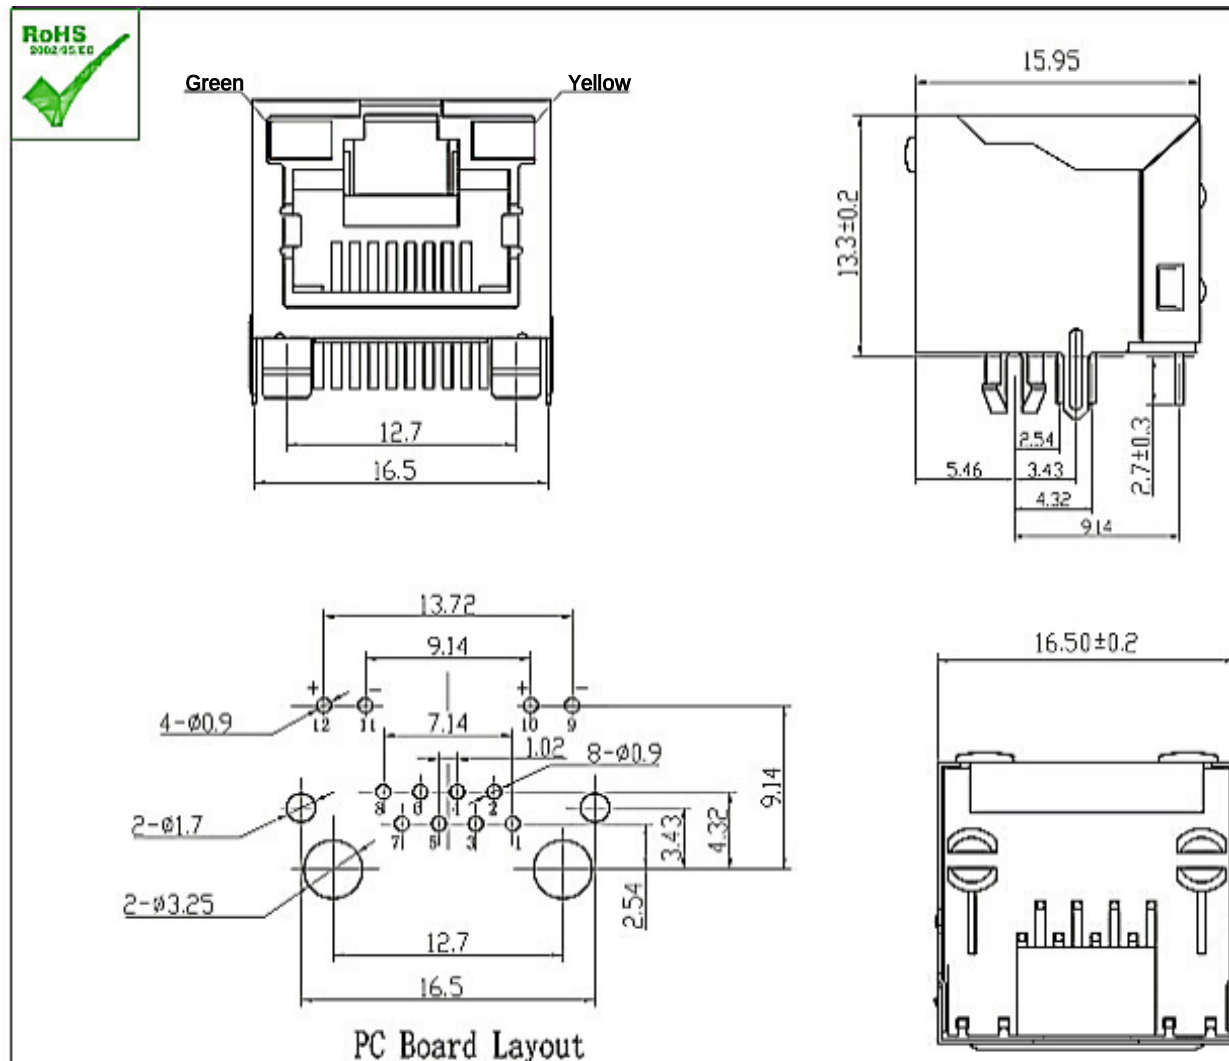

Unless otherwise specified, Tolerance: XX ±0.25

HQST ELECTRONICS CO., LTD.

<http://www.hqst1688.com>

石门盈盛电子科技有限公司

TEL: 0755-21083343 18673625585
www.wangluobianyaqi.cn
E-mail: hqst008@163.com