

10/100BASE-TTRANSFORMERMODULES

PartNO:HX81601S



Features:




- Designed for Ethernet 10/100 BASE-T.
- Supports 8 pairs of category 5 UTP cable.
- Cable interface for isolation and low common mode emissions.
- Designed to meet IEEE 802.3AT requirement ,Available for PoE.
- Compliance with ROHS requirements
- Operating temperature range: -40°C~+85°C .
- Storage temperature range: -55°C to +125°C.

Specifications

Electrical Specification@25° C Operating Temperature -40°C~+85°C									
Part NO	Trun Ratio(±2%		OCL primary@10 0KHz 0.1Vms	Leakage primary@10KH z 0.1Vms	Cww(Pri:Sec)	DCR(Ω)			
	TX	RX				Primary	Secondary		
HX81601S	1CT:1CT	1CT:1CT	350uH Min	0.5uH max	35PF	0.9Max	1.2Max		
Electrical Specification@25° C Operating Temperature -40°C~+85°C									
Part NO	Insertion loss(dB max) 1-100MHz	Return Loss(db min)MHz				CMRR(dB min)MHz		Crosstalk(dB min)MHz	Isolation Voltage(Vrms min)
		1-30	40	50	60-100	1-60	60-100		
HX81601S	-1.2	-18	-14.4	-13.1	-12	-40	-35	-40	1500

Schematic


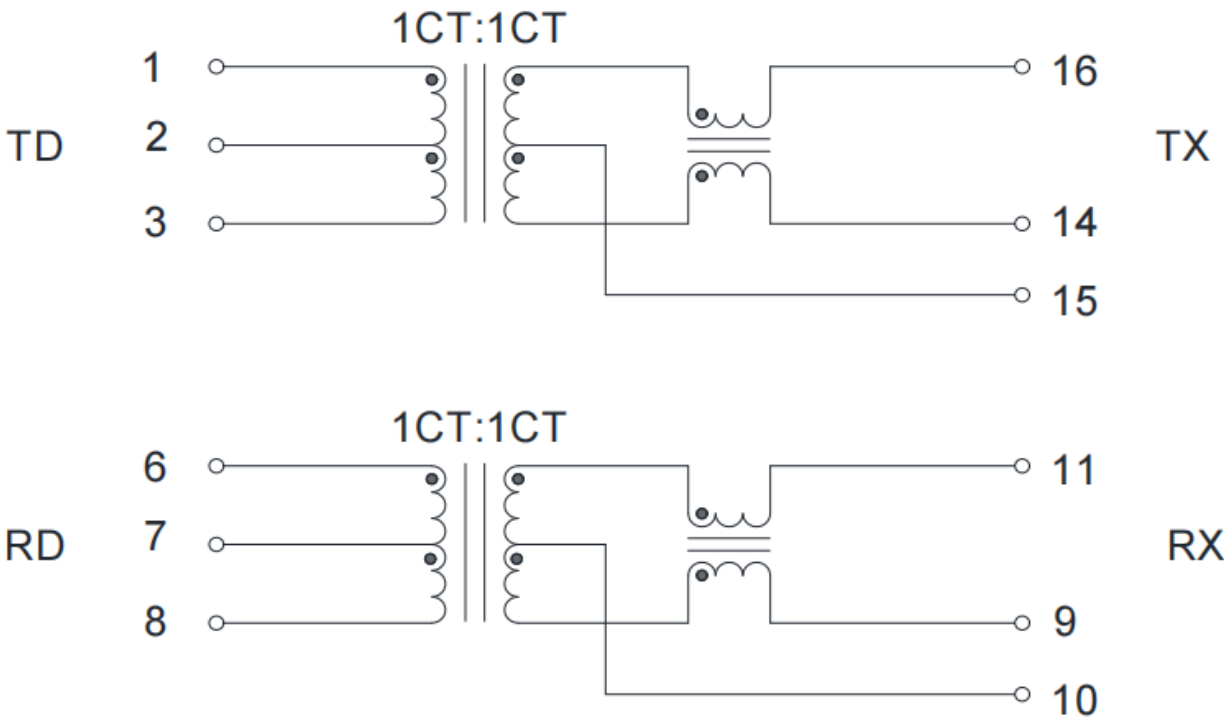


10/100BASE-T TRANSFORMER MODULES


PartNO:HX81601S




Mechanical:

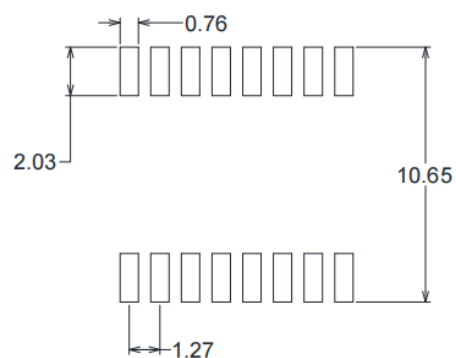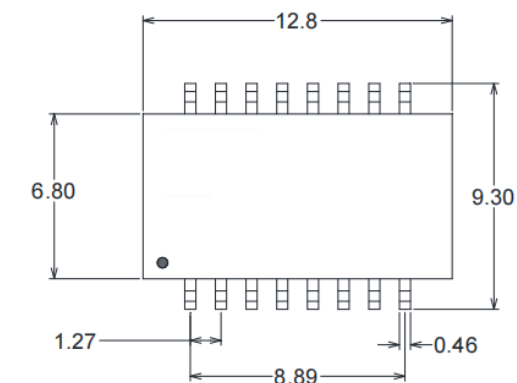

SUGGESTED PAD LAYOUT

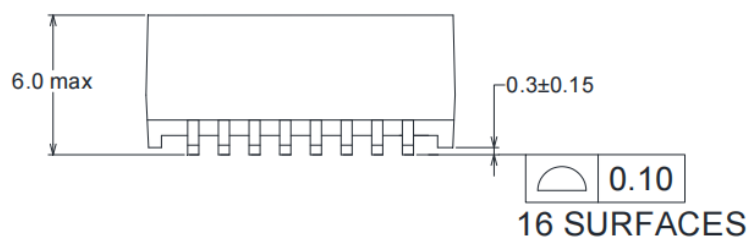

16 SURFACES



HQST ELECTRONICSCO.,LTD.

<https://shop104373926.taobao.com/>

石门盈盛电子科技有限公司

TEL:0755-21083343 18673625585

www.wangluobianyaqi.cn

E-mail:hqst008@163.com