

1Port RJ45 Connector

HQST-H1159A02A-GY



Features:

ROHS Compliant (pb free)

Meets or exceeds IEEE802.3 standards including 350uH Min OCL with 8mADC

High performance for EMI suppression , Crosstalk, Return loss and Consistent Electrical

Minimum 2250VDC isolation per IEEE802.3 requirement


Minimize PCB space and Simplify PCB Layout

Less magnetic components to be placed on PCB, higher reliability and yields


OPERATING TEMPERATURE: 0°C~+85°C

STORAGE TEMPERATURE: -40°C~+85°C


Mechanical Dimensions:

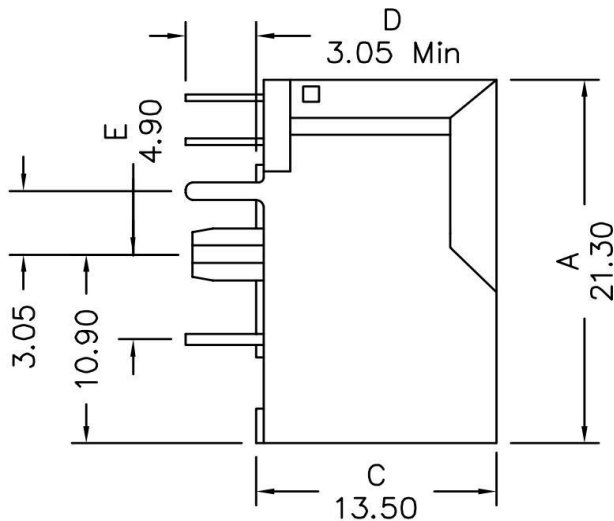

(Side View)

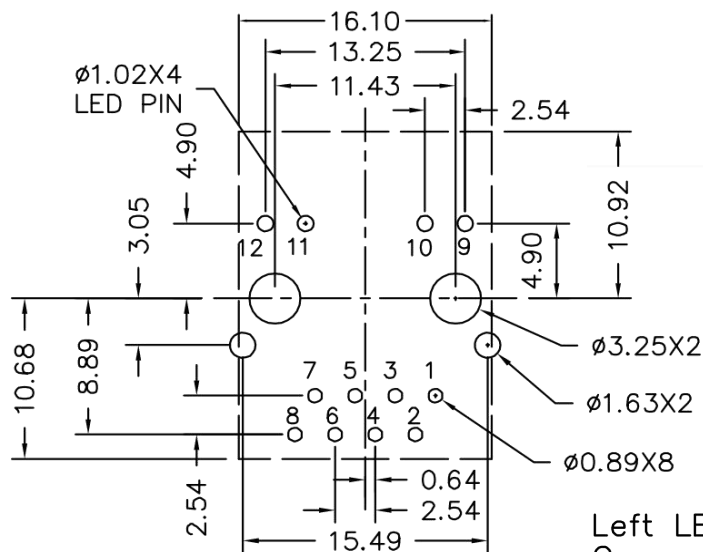

Left LED
Green LED



(Front View)

Right LED
Yellow LED

HQST ELECTRONICS CO., LTD.

<https://shop104373926.taobao.com/>

石门盈盛电子科技有限公司

TEL: 18673625585 18673625805

www.wangluobianyaqi.cn

E-mail: hqst008@163.com

1Port RJ45 Connector

HQST-H1159A02A-GY




Electrical Specification@25° C Operating Temperature 0 to +85° C

Part NO	OCL primary@100KHz 0.1Vms 8mA	Leakage primary@10KHz 0.1Vms	LED Specification				
			Standard LED	Wavelength	Forward V(Min/Max)	Forward A	Type
H1159A02A-GY	350uH Min	0.5uH max	Green	568nm	1.8v/2.8v	20mA	squareness
			Yellow	585nm	1.8v/2.8v	20mA	squareness

Electrical Specification@25° C Operating Temperature 0 to +85° C

Part NO	Insertion loss(dB max) 300-100MHz	Return Loss(db min)MHz				Crosstalk(dB min)MHz			Isolation Voltage(UTP Side to Chip Side)
		1-10	10-30	30-60	60-80	1-30	30-60	60-100	
H1159A02A-GY	-1.0	-20	-16	-12	-10	-40	-30	-30	2250VDC

Schematics

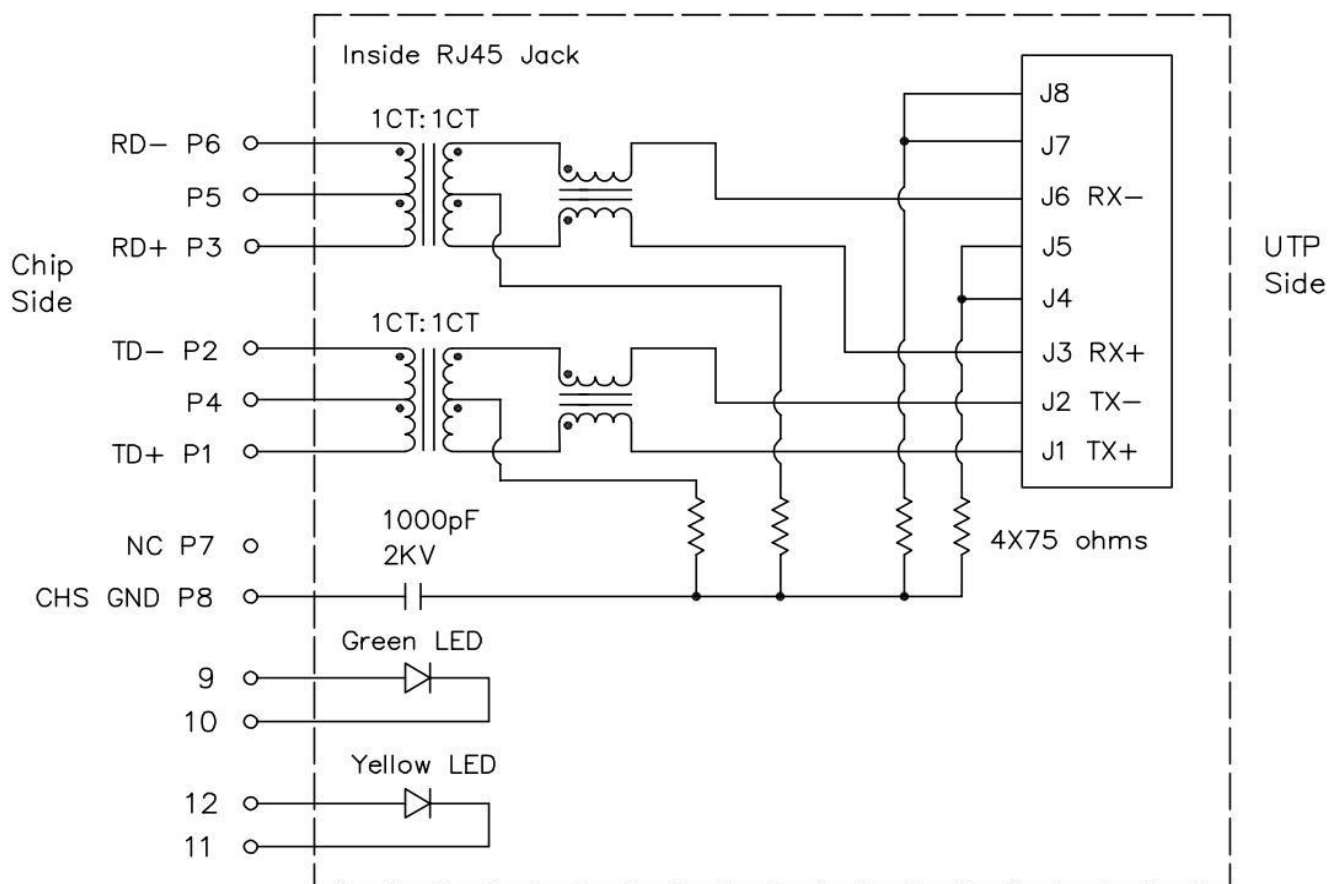

Notes: Connect CHS GND to PCB Ground

HQST ELECTRONICS CO., LTD.

<https://shop104373926.taobao.com/>

石门盈盛电子科技有限公司

TEL: 18673625585 18673625805

www.wangluobianyaqi.cn

E-mail: hqst008@163.com