


PLC Coupling Transformer
P/N:B5-33602A



Features:

- RF Power : 250mW.
- DC Current : 30mA.
- Packaging : 1000 pcs. per 13-inch reel.
- Operating temperature range :-25'C to +85C
- Storage temperature range :-25C to +85C

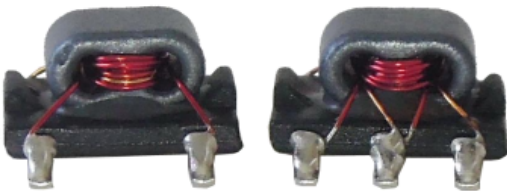


Specifications

Electrical Specification@25° C

Wibding	truns	Wire spec	Turn ratio @100KHz/0.1v	Impedance Ratio@5~100MHz	L@100KHz/0.1V
1-2	3T	0.12mm 1uew (Red)	1:1+5%	1:1 CT	100pH Typ.
2-3	3T	0.12mm 1uew (Natural)			
6-4	6T	0.12mm 1uew (Natural)			



Dimension

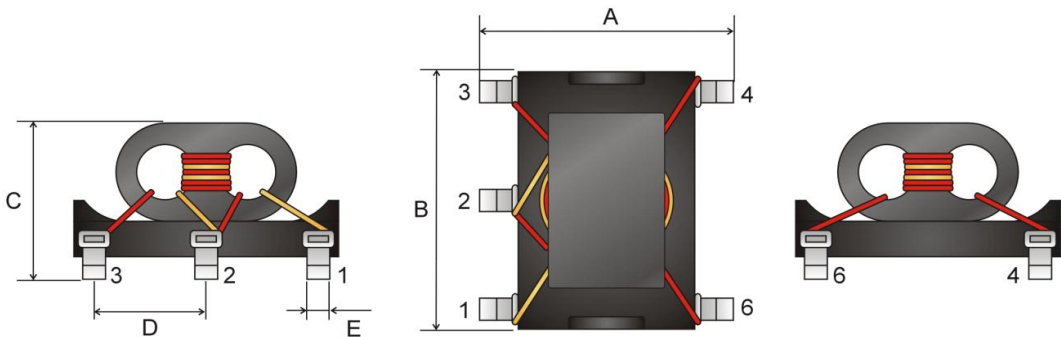

A	6.2±0.3
B	6.0±0.3
C	4.5 Max.
D	2.0±0.2
E	0.6 Ref.

Schematic

PCB Layout UNIT = mm

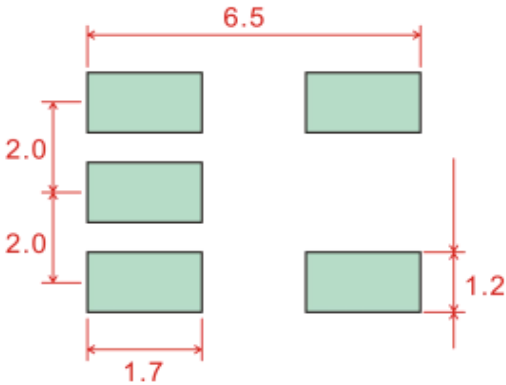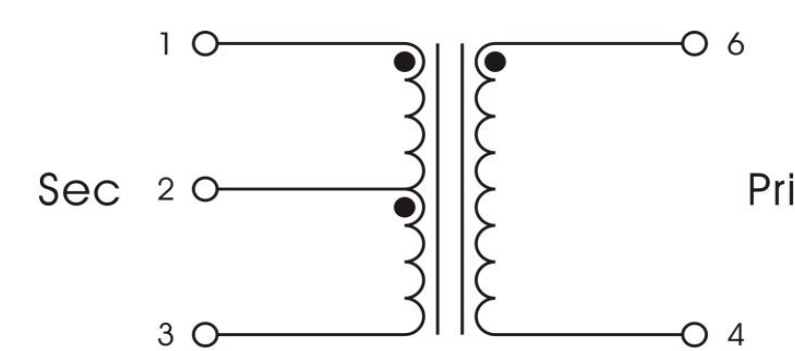

HQST ELECTRONICS CO., LTD.

<https://shop104373926.taobao.com/>

石门盈盛电子科技有限公司

TEL:0755-21083343 18673625585

<http://wangluobianyaqi.cn/>

E-mail:hqst008@163.com