

PLC Coupling Transformer (PLC耦合變壓器)

P/N: PTD8MC-111T-A



Features:



- ※ Electrical Specifications @ 25°C
- * Frequency Range: 2MHz-68MHz
- * RoHS compliant. 260°C reflow compatible
- * Turns Ratio (L1:L2:L3) = 1:1:1±20
- * L1/L2/L3 Winding Inductance: 12.µH @ 2MHz
- * Operating temperature range: -40°C ~ 85°C

Applications:

- * For use with the AR7420 PLC IC
- * For VHF/UHF receivers/transmitters and push-pull amplifiers





Dimension

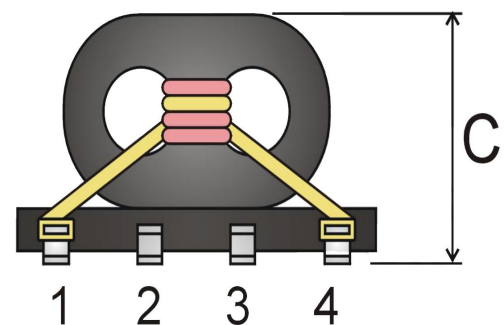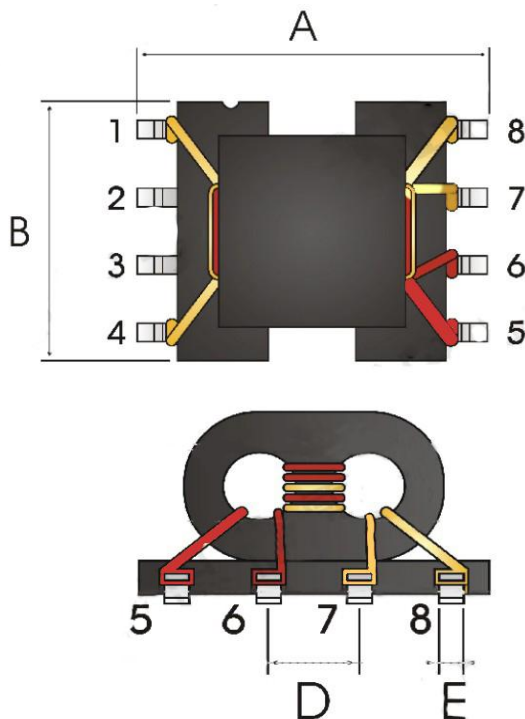

UNIT: mm

A	12.6 ± 0.2
B	9.7 ± 0.2
C	6.0 MAX
D	2.55 ± 0.15
E	0.65 ± 0.05

Schematic

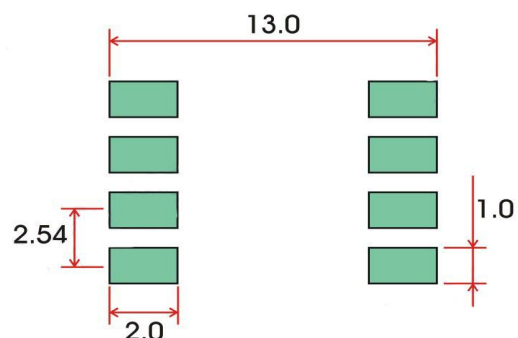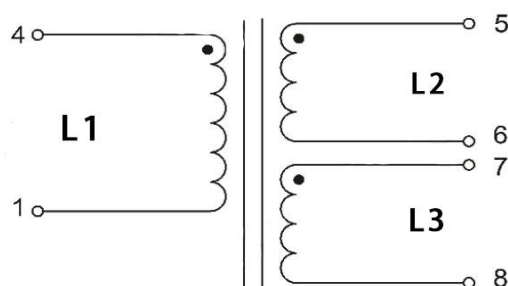

HQST ELECTRONICS CO.,LTD

<https://shop104373926.taobao.com/>

湖南省石门华强盛电子科技有限公司

TEL: 18673625585 18673625805

QQ: 278894196 229197143

<https://18673625585.1688.com/>