


Features:






- Designed for Ethernet 100/1000 BASE-T.
- Supports 8 pairs of category 5 UTP cable.
- Conforms to ANSI/J-STD-002, 245°C reflow peak temperature per IPC/EIA J-STD-003A.
- Compliant with IEEE 802.3at standard for 1000 BASE-T.
- Suitable for End-span POE+ applications with 840mA current capability
- Operating temperature range: -40°C to +85°C.
- Storage temperature range: -50°C to +120°C.

Specifications

Electrical Specification@25° C Operating Temperature -45 to +80° C									
Part NO	Trun Ratio(±2%)		OCL primary@100KHz 0.1Vms 21MA	Leakage primary@10KH z 0.1Vms	Cww(Pri:Sec)	DCR(Ω)			
	TX	RX				Primary	Secondary		
H82405S-8	1CT:1CT	1CT:1CT	350uH Min	0.5uH max	35PF	0.9Max	0.9Max		
Electrical Specification@25° C Operating Temperature -45 to +80° C									
Part NO	Insertion loss(dB max) 1-100MHz	Return Loss(db min)MHz				CMRR(dB min)MHz		Crosstalk(dB min)MHz	Isolation Voltage(Vrms min)
		1-30	40	50	60-100	1-60	60-100		
H82405S-8	-1.2	-18	-14.4	-13.1	-12	-40	-35	-40	1500


Schematic

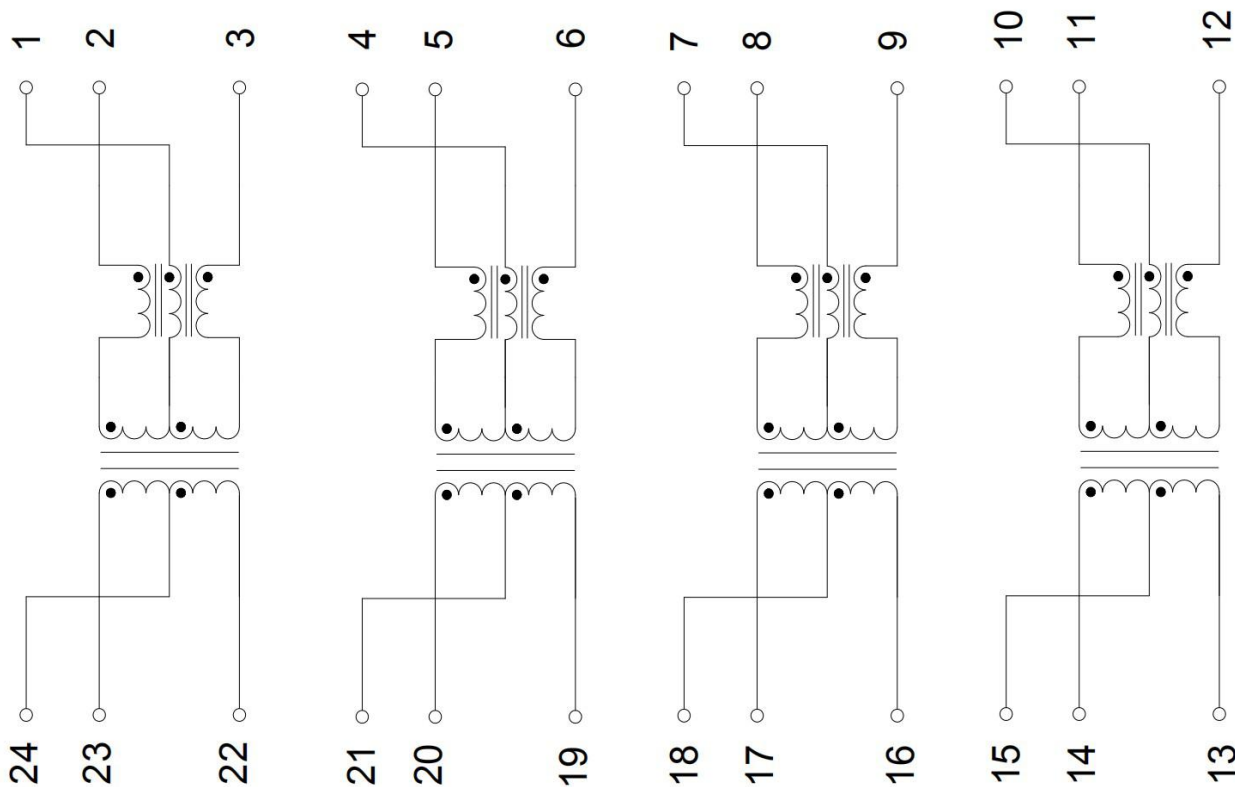

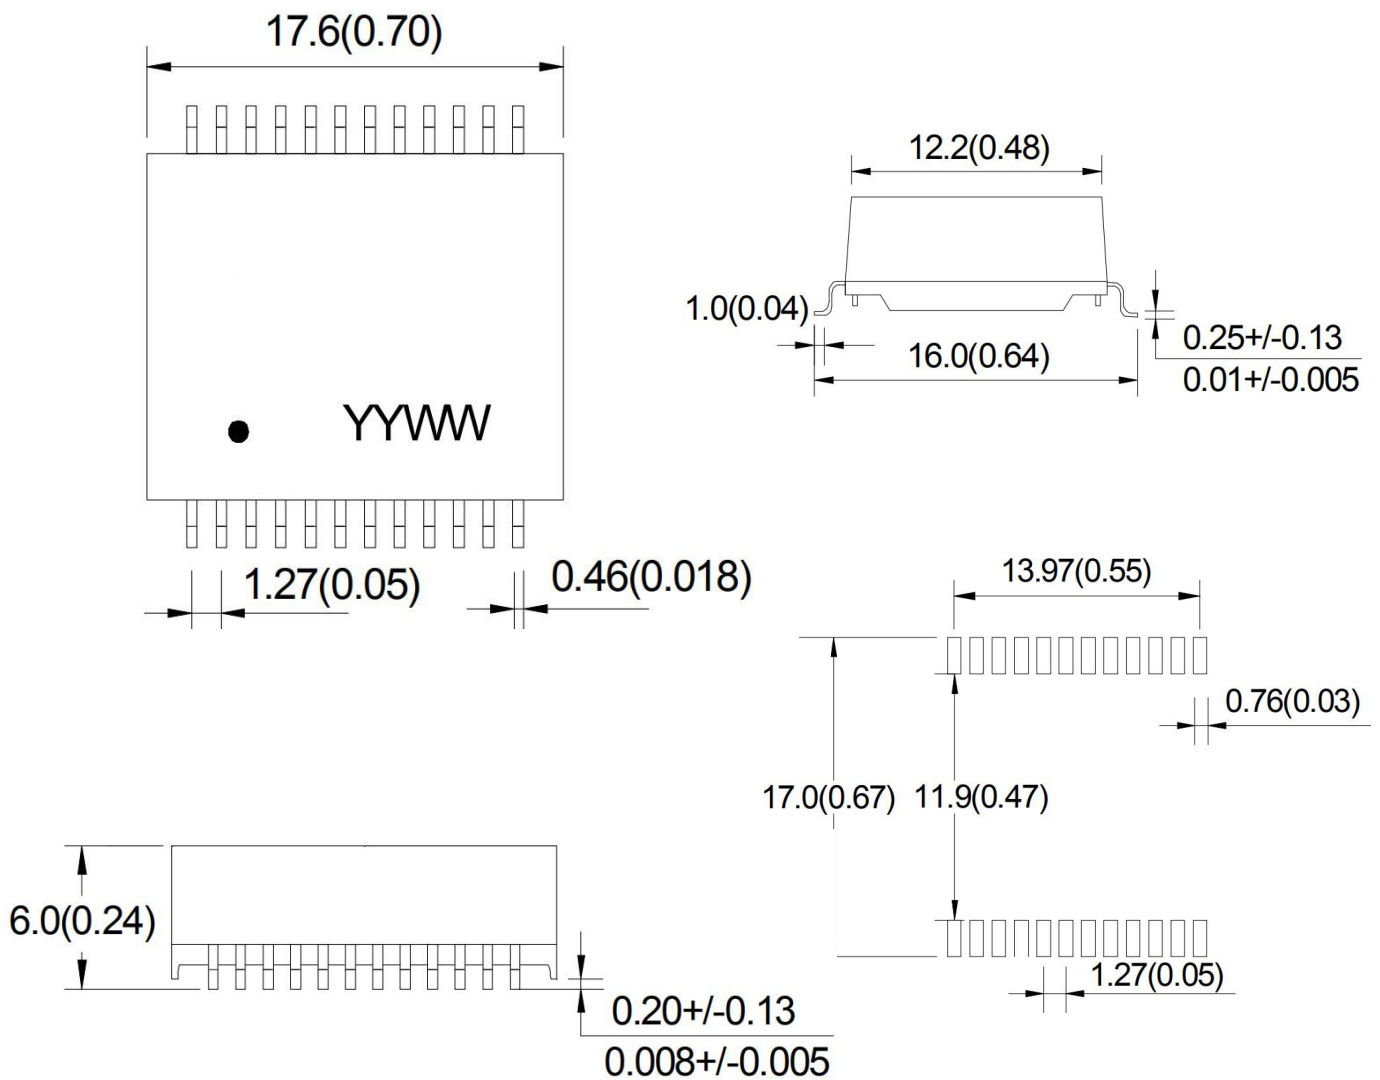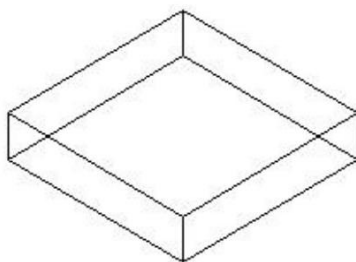Mechanical:**REEL**

INNER CARTON: 350(L)*350(W)*90(H)

EXPORT CARTON: 370(L)*370(W)*480(H)



1. ONE ROLL : 350PCS

2. TWO ROLL BOX : 700

3. FIVE BOX CARTON : 3500PC