

1*1Port RJ45 Connector

HQST-G1152E02A-YGB




Features:


- ROHS Compliant (pb free)
- Meets or exceeds IEEE802.3 standards including 350uH Min OCL with 8mADC
- High performance for EMI suppression , Crosstalk, Return loss
- Minimun 2250VDCisolation per IEEE802.3 requirement
- Minimize PCB space and Simplify PCB Layout
- Less magnetic components to be placed on PCB, higher reliability and yields
- Operating teperature: 0°C~+70°C
- Storage temperature: -40°C~+85°C

Mechanical Dimensions:


Yellow LED
Left LED
Green LED
Right LED




(Top View)

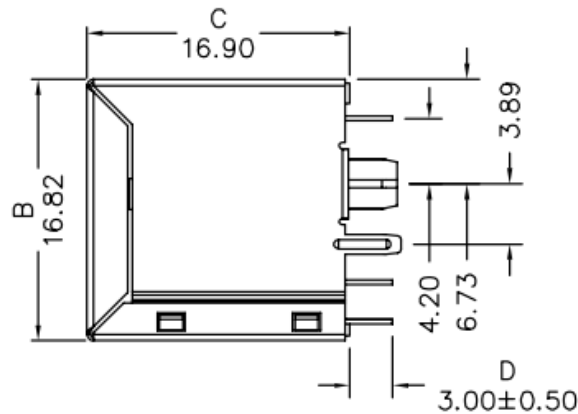


(Side View)



(Bottom View)

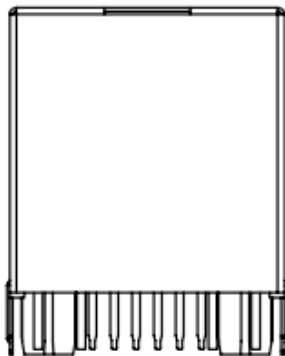

(Front View)

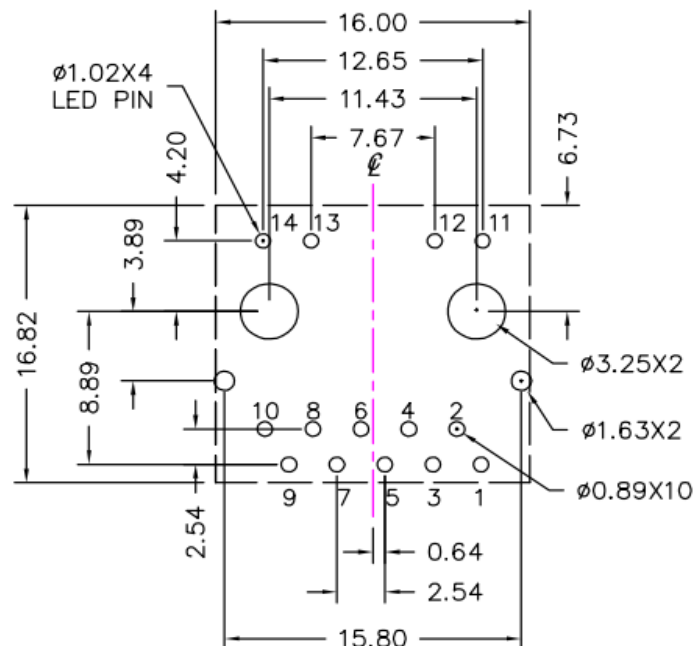

Recommended PCB layout (Component Side View)

All dimension tolerance are ± 0.08 unless otherwise specified

1*1Port RJ45 Connector

HQST-G1152E02A-YGB




Electrical Specification@25° C Operating Temperature 0 to +70° C

Part NO	OCL primary@100KHz 0.1Vms 8mA	Leakage primary@10KHz 0.1Vms	LED Specification				
			Standard LED	Wavelen gth	Forward V(Min/Max)	Forward A	Type
G1152E02A -YGB	350uH Min	0.5uH max	Green	568nm	1.7v/2.6v	20mA	squareness
			Yellow	585nm	1.7v/2.6v	20mA	squareness

Electrical Specification@25° C Operating Temperature 0 to +70° C

Part NO	Insertion loss(dB max) 1-100MHz	Return Loss(db min)MHz				DMRR(dB min)MHz		Crosstalk(dB min)MHz	Isolation Voltage(Vrms min)
		1-30	40	50	60-100	1-60	60-100		
G1152E02A -YGB	-1.0	-20	-16	-16	-12	-50	-50	-30	2250

Schematic

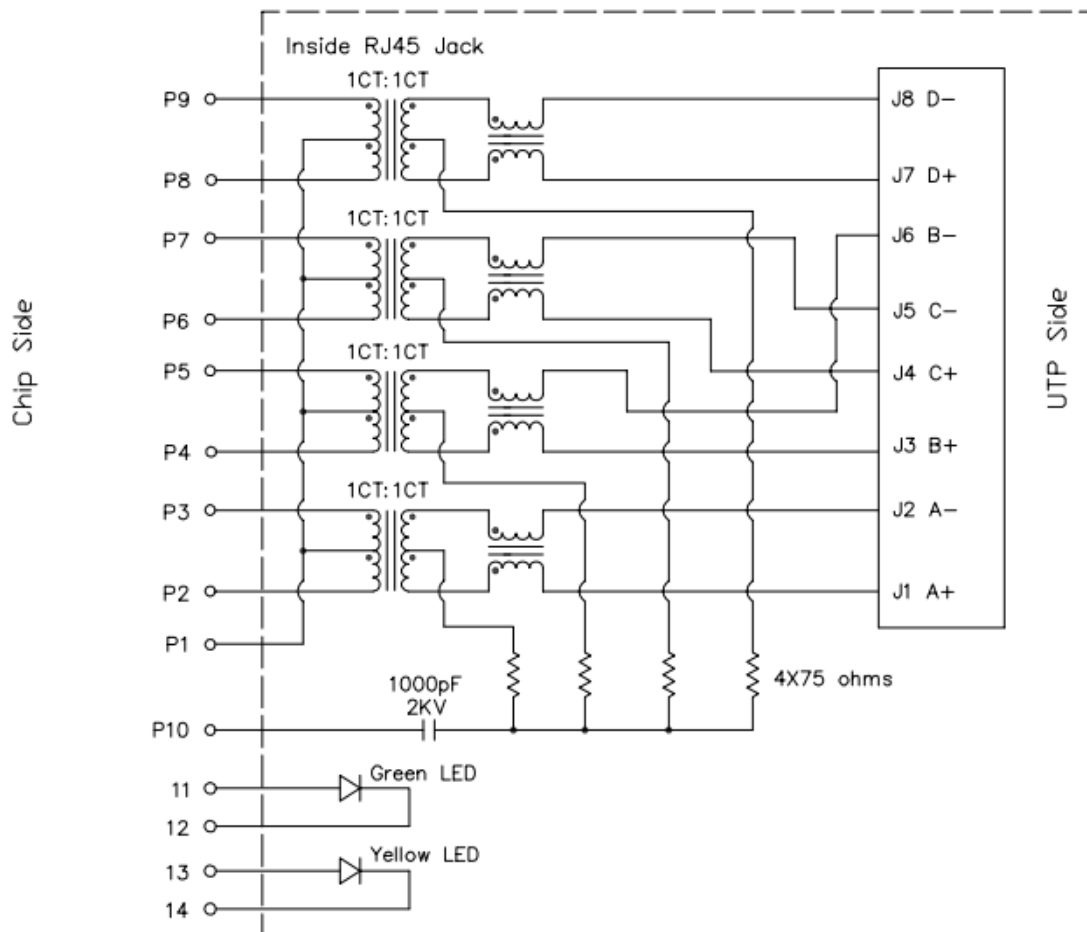

HQST ELECTRONICS CO., LTD.

<https://shop104373926.taobao.com/>

石门盈盛电子科技有限公司

TEL:0755-21083343 18673625585

<http://wangluobianyaqi.cn/>

E-mail:hqst008@163.com