

PLC Coupling Transformer （ PLC耦合變壓器）



P/N:P6S11-\*\*-U-0.2A

Features:


This is a RoHS compliant component



Electrical Specifications @ 25°C

Operating temperature:0°C~+70°C

Storage temperature:-25°C~+85°C







Specifications

Electrical Specification@25° C Operating Temperature 0°C~+70°C

| Part NO         | Turn Ratio<br>(±2%)<br>@10KHz/0.1V | Inductance<br>@100KHz/0.1V | Leakage Inductance(max 6-4short)<br>@100KHz/0.1V | DCR Ω<br>max@20°C | Hi-Pot [1-3:6-4]<br>AC, 0.5mA ,2s |
|-----------------|------------------------------------|----------------------------|--------------------------------------------------|-------------------|-----------------------------------|
| P6S11-7.5U-0.2A | 1CT:1CT                            | 7.5uH Min                  | 1-3=0.5uH                                        | 0.65              | 1000V                             |
| P6S11-26U-0.2A  | 1CT:1CT                            | 26uH Min                   | 1-3=0.5uH                                        | 0.75              | 1000V                             |

Dimension

Schematic

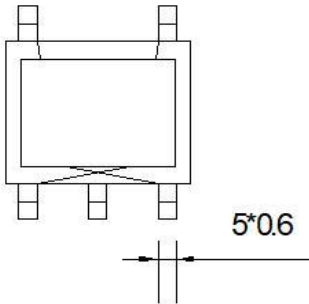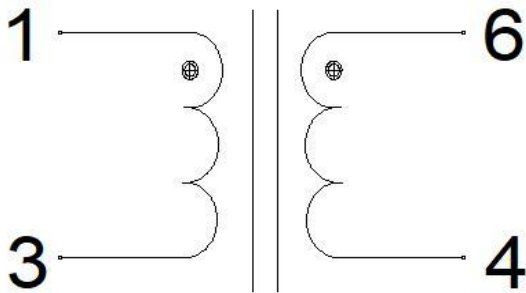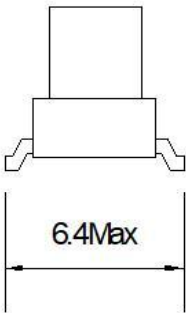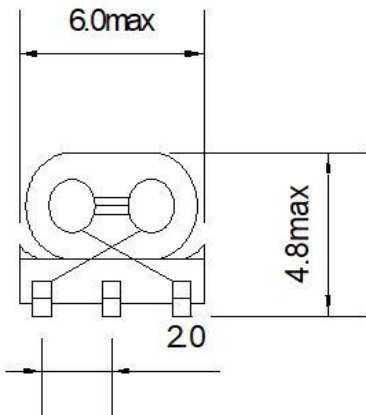

| P          | 6           | S         | ***             | -  | X8         | -  | T           |        |
|------------|-------------|-----------|-----------------|----|------------|----|-------------|--------|
| 产品类别       | 变压器<br>针脚数量 | 变压器封<br>装 | 圈比<br>(TX:RX:PL | -  | 变压器<br>分 类 | -  | 其它特性        | 包装方式   |
| P PLC耦合变压器 | 4:4针;       | S:SMT贴片   | 111=1:1:1       | 分号 | A 强电220V   | 分号 | 常规不特定标<br>示 | T: 卷装; |
|            | 6:6针;       | D:DIP直插   |                 |    | B 弱电       |    |             | G: 管装; |
|            | 8:8针;       |           |                 |    |            |    |             |        |

HQST ELECTRONICS CO., LTD

<https://shop104373926.taobao.com/>

石门盈盛电子科技有限公司

TEL:18673625585 QQ:278894196

<https://18673625585.1688.com/>