

1Port RJ45 Connector

HQST-E11S1B01A-00B-D



ELECTRICAL:





- | | |
|------------------------|-------------------------------|
| 1. VOLTAGE RATING: | 125VAC RMS |
| 2. CURRENT RATING: | 1.5 AMP |
| 3. CONTACT RESISTANCE | 30 MILLIOHMS MAX |
| 4. 30 MILLIOHMS MAX | 500 MEGOHMS MIN @ 500 VDC |
| 5. DIELECTRIC STRENGTH | 1000VAC RMS 50HZ OR 60HZ 1MIN |

MECHANICAL:


- | | |
|-------------------------------|--|
| 1. HOUSING & INSERT MATERIAL: | PBT UL94V-0 |
| 2. CONTACT MATERIAL | DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL |
| 3. SHIELD | 0.20~0.25MM THICKNESS BRASS WITH TIN PLATED |
| 4. MATING/UNMATING FORCE | 2.2KG.F MAX |
| 5. RETENTION STRENGTH | 7.7KG.F MIN BETWEEN JACK AND PLUG |
| 6. OPERATING LIFE | 600 CYCLES MIN |

ENVIRONMENTAL:

- | | |
|--------------|------------------------------------|
| 1. STORAGE | -40°C~+80°C RELATIVE HUMIDITY <70% |
| 2. OPERATION | -40°C~+80°C |

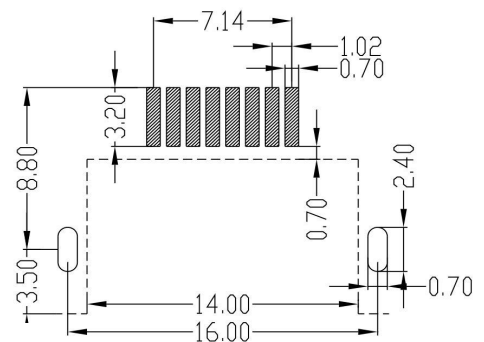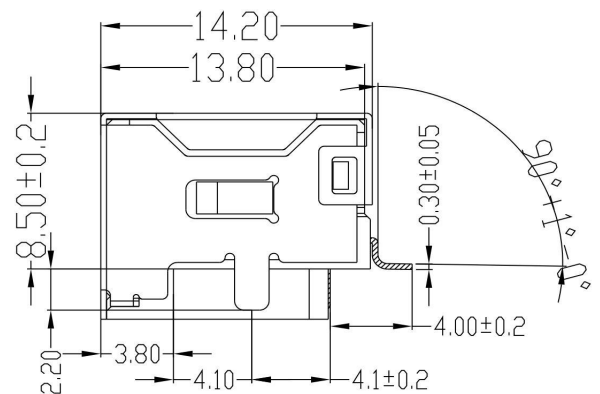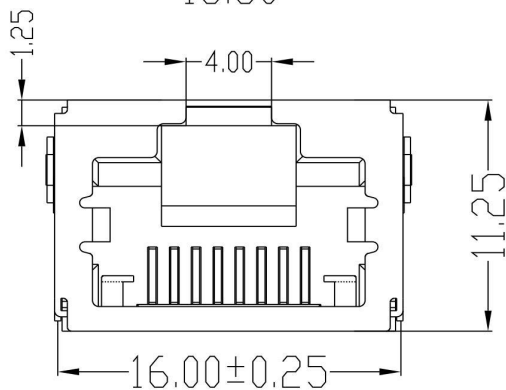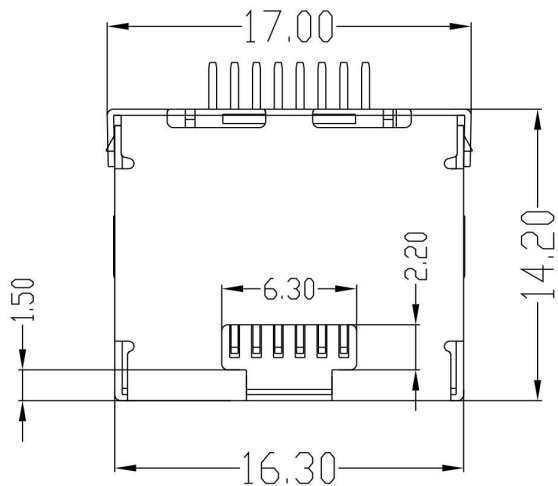

PCB 参考图

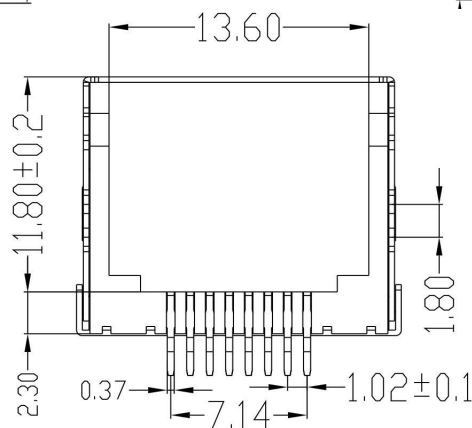

HQST ELECTRONICS CO., LTD.

<https://shop104373926.taobao.com/>

石门盈盛电子科技有限公司

TEL: 0755-21083343 18673625585

www.wangluobianyaqi.cn

E-mail: hqst008@163.com