


HQST-E1453M01Z



1.VOLTAGE RATING: 125VAC RMS
2.CURRENT RATING: 1.5 AMP
3.CONTACT RESISTANCE 30 MILLIOHMS MAX
4.INSULATION RESISTANCE 500 MEGOHMS MIN @ 500 VDC
5.DIELECTRIC STRENGTH 1000VAC RMS 50HZ OR 60HZ 1MIN

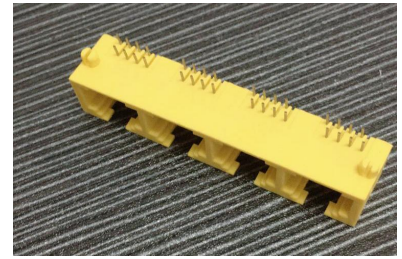

1.HOUSING & INSERT MATERIAL GLASS FILLED PA66(UL94V-0)

2.CONTACT MATERIAL DIAMETER 0.46MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL


3.SHIELD 0.20~0.25MM THICKNESS BRASS WITH TIN PLATED

4.MATING/UNMATING FORCE 2.2KG.F MAX

5.RETENTION STRENGTH 7.7KG.F MIN BETWEEN JACK AND PLUG

6.OPERATING LIFE 600 CYCLES MIN

1. STORAGE	-40℃~+85℃ RELATIVE HUMIDITY <70%
2. OPERATION	-40℃~+70℃

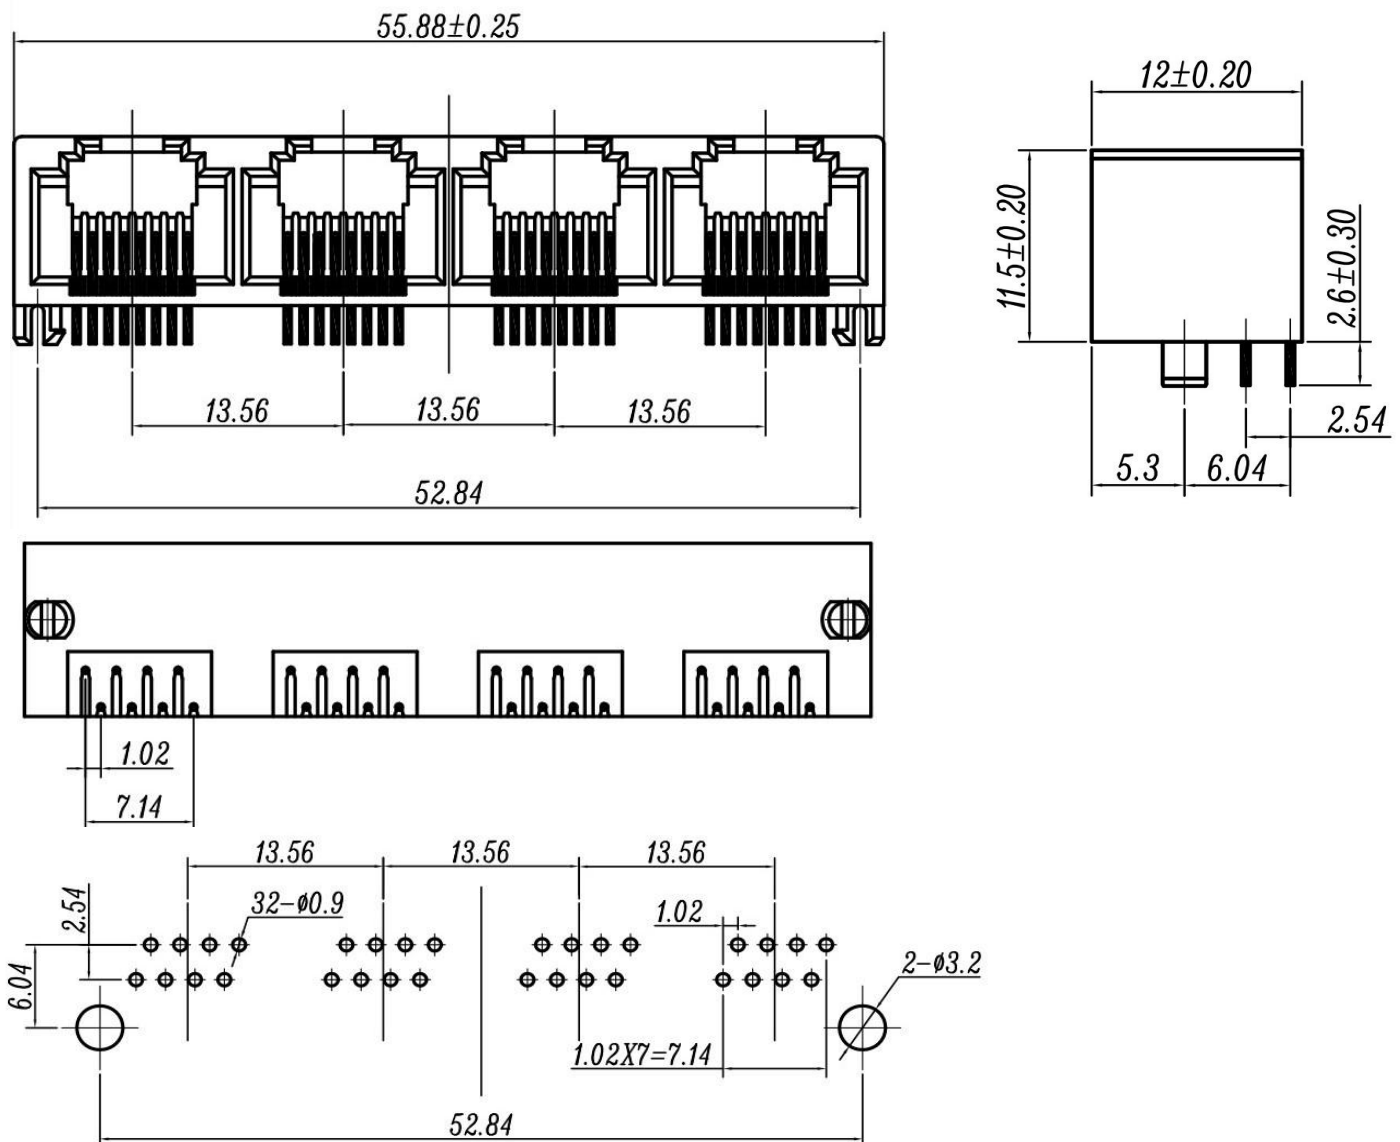

<https://shop104373926.taobao.com/>

石门盈盛电子科技有限公司

www.wangluobianyaqi.cn

E-mail: hqst008@163.com