


Features:

- GENERAL SPECIFICATIONS
- OPERATING TEMPERATURERANGE: -40°C to +125°C
- CURRENT RATING: 150MAAC
- VOLTAGE-TIME: 11VuS
- Designed to comply with the following requirements as defined by IEC60950-1.
- EN60950-1.UL60950-1/CSA60950-1 and AS/NZS60950.1:
- Functional insulation for a primary circuit at a working voltage of 400Vrms
- Qualified to AEC-Q200

Specifications

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:			
PARAMETER		TEST CONDITIONS	VALUE
D.C.RESISTANCE	1-3	@20°C	0.35 ohms max.
D.C.RESISTANCE	6-4	@20°C	0.50 ohms max.
INDUCTANCE	1-3	10kHz, 100mVAC, Ls	475uH min.
DIELECTRIC	1-6	3125VAC, 1 second	2500VAC, 1 minute
URNS RATIO		(6-4):(1-3)	1.7:1, ±2%

Schematic

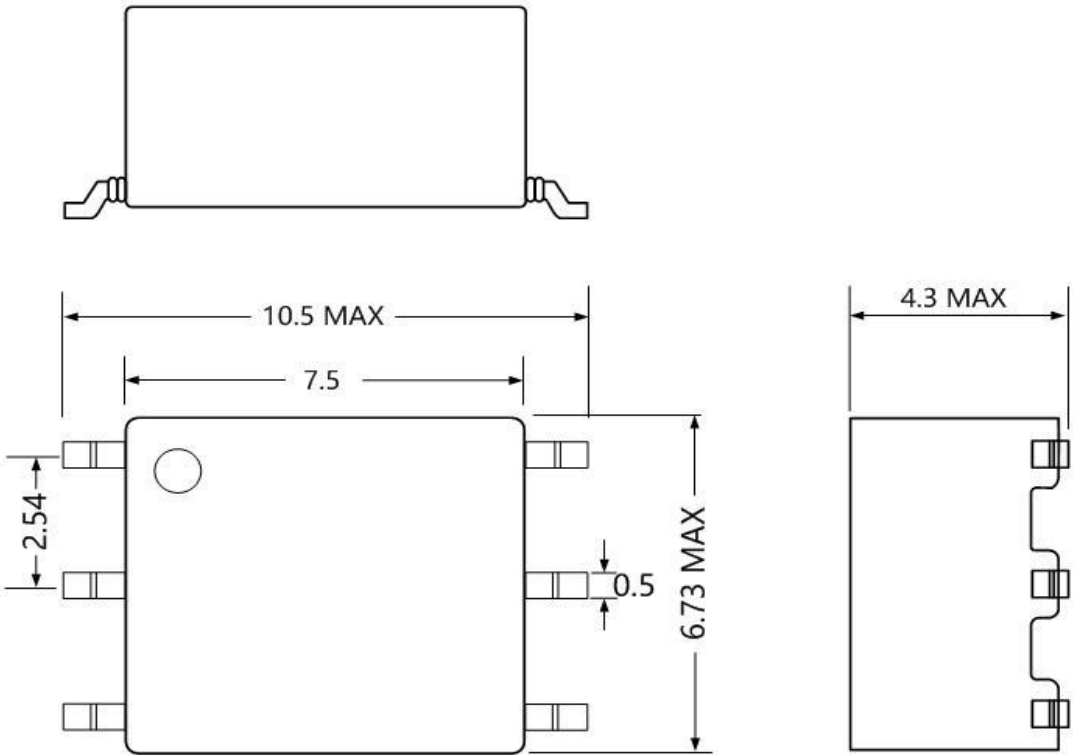


10BASE-TX TRANSFORMER MODULES

Part NO:H80604S



Mechanical:

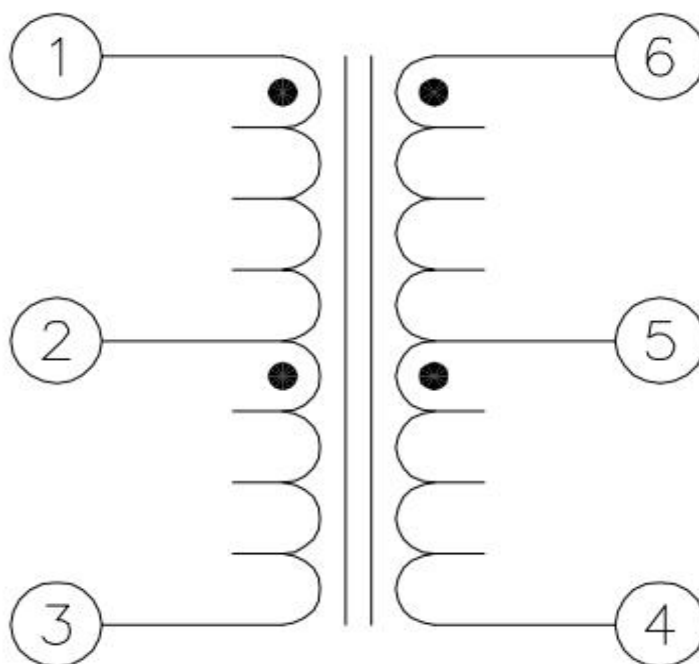

HQST ELECTRONICS CO., LTD.

<https://shop104373926.taobao.com/>

石门盈盛电子科技有限公司

[TEL:0755-21083343_18673625585](tel:0755-21083343_18673625585)

www.wangluobianyaoi.cn

E-mail:hqst008@163.com