


1000 BASE –T DUAL PORT MAGNETICS MODULES

P/N: G2P109N-C LF DATA SHEET

Page :1/2

Feature

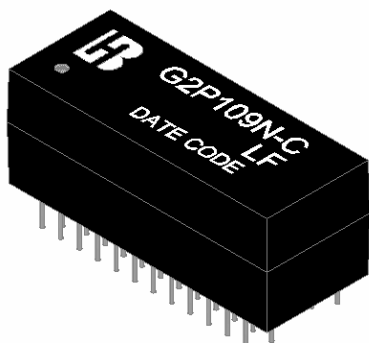

- Designed for Ethernet 100/1000 BASE-T, full duplex applications.
- Supports 8 pairs of category 5 UTP cable.
- Cable interface for isolation and low common mode emissions.
- Compliant with IEEE 802.3at standard for 1000 BASE-T.
- Suitable for End-span POE applications with 720mA current capability.
- Compliance with ROHS requirements.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +85°C.


Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL (uH Min) @100KHz/0.1V with 18mA DC Bias	Cross talk Attenuation (dB Min)			HI-POT (Vrms)
	TX	RX		30MHz	60MHz	100MHz	
G2P109N-C LF	1CT:1CT	1CT:1CT	200	-40	-35	-30	1500

Continue

Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)@ Load 100 Ω					DCMR (dB Min)		
	1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz	100MHz	30MHz	60MHz	100MHz
G2P109N-C LF	-1.0	-18	-14.4	-13.1	-12	-10	-43	-37	-33


Schematic

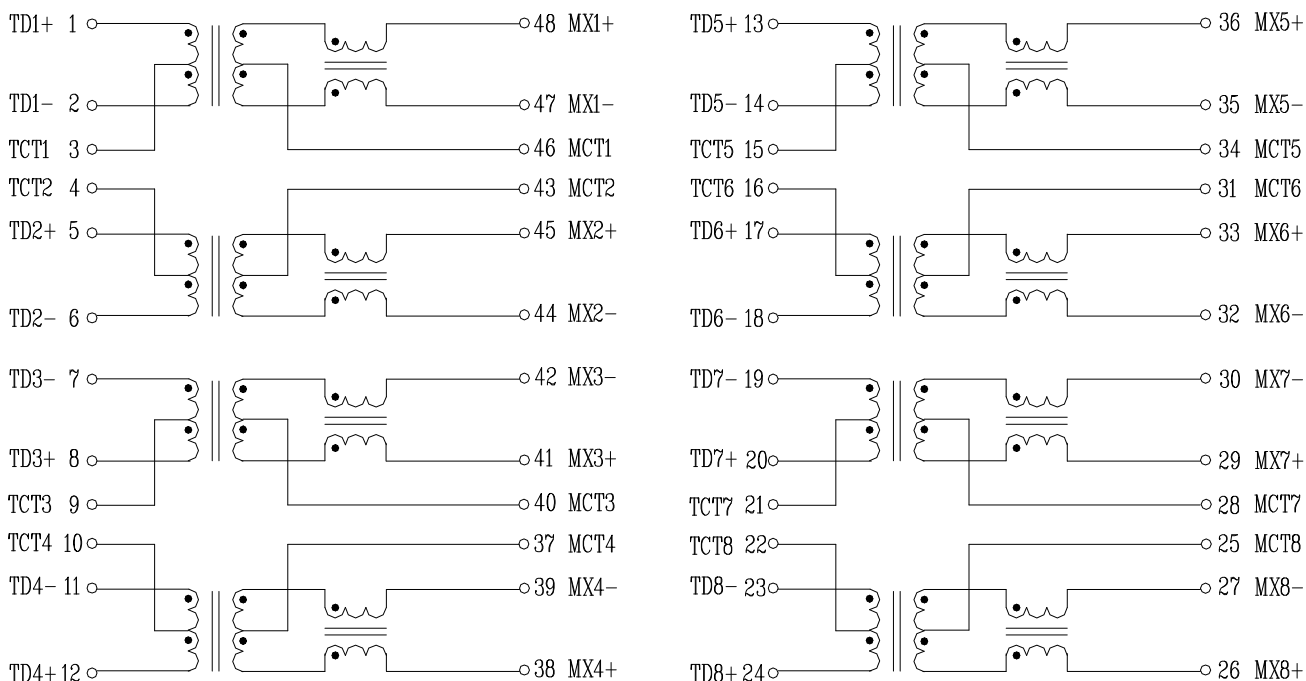

1000 BASE –T DUAL PORT MAGNETICS MODULES


P/N: G2P109N-C LF DATA SHEET

Mechanical

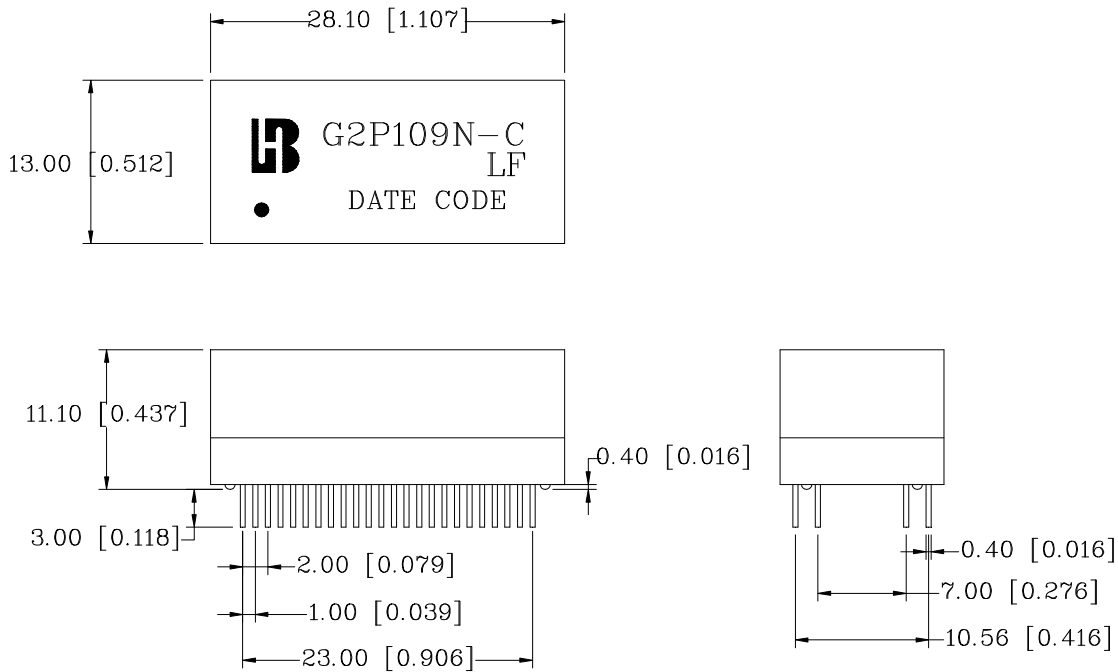

Units: mm[Inches] Tolerances XX.X0 : ± 0.25 [0.010]
0.XX : ± 0.05 [0.002]

PCB Layout mounting Hole (Top View)

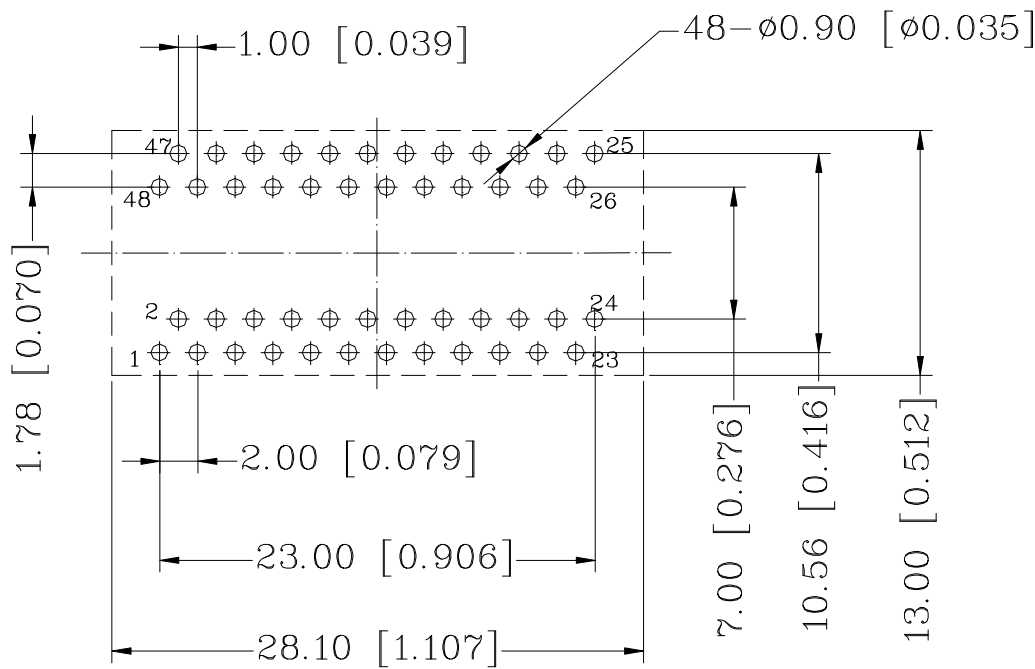

Units: mm[Inches] Tolerance: xx.x0 ± 0.25 [0.010]
0.xx ± 0.05 [0.002]