


10Base-T Filter

HR61101G


Electrical Specification @25°C

Isolation Voltage: 1500 Vrms (Input to Output)
Insertion Loss: -1.0dB Maximum @1MHz ~ 10MHz
Return Loss: -15dB Minimum @1MHz ~ 10MHz
Crosstalk: -30dB Minimum @1MHz ~ 10MHz
Attenuation @30MHz
 Transmit: -30dB Minimum
 Receive: -20dB Minimum
Cut-off Frequency: 17MHz Typical
I/O Impedance: 100 ohms

Schematics

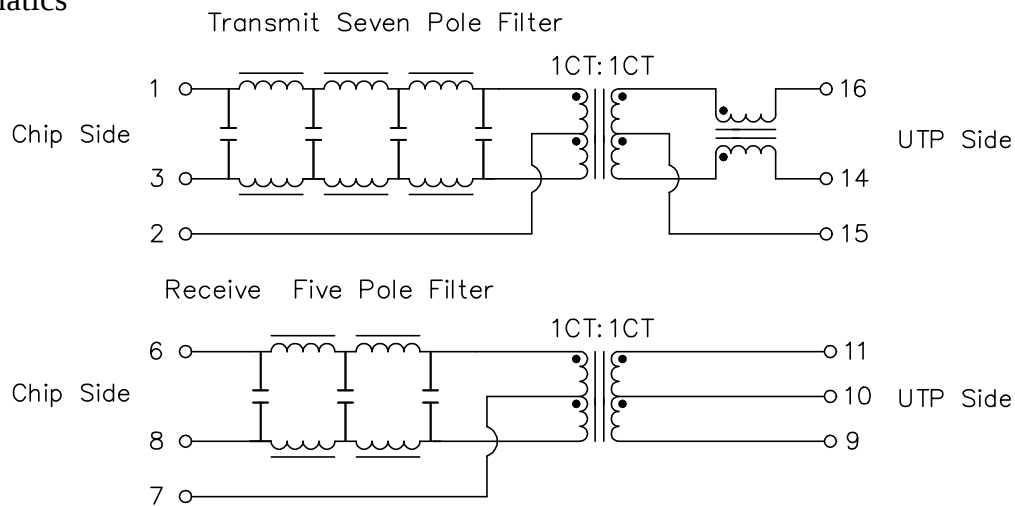

Mechanical Dimensions

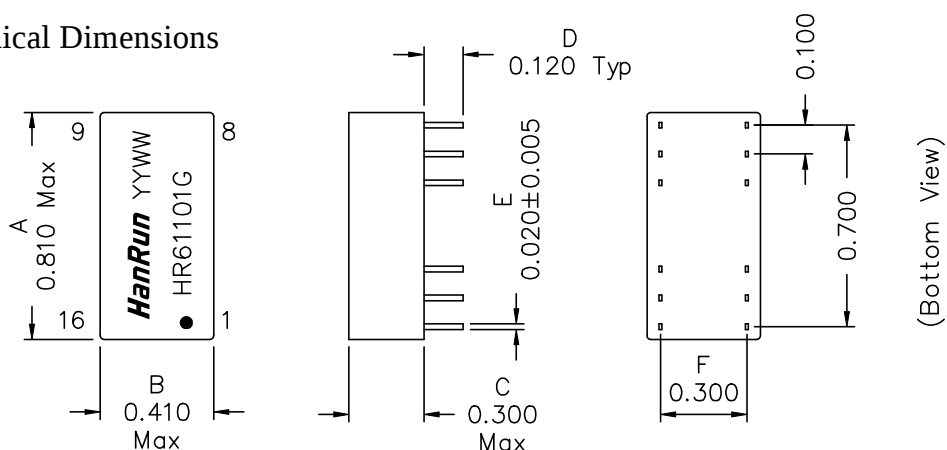

Dimensions in inches

Unless otherwise specified, Tol.: .xxx ±0.010

REV.A/1