

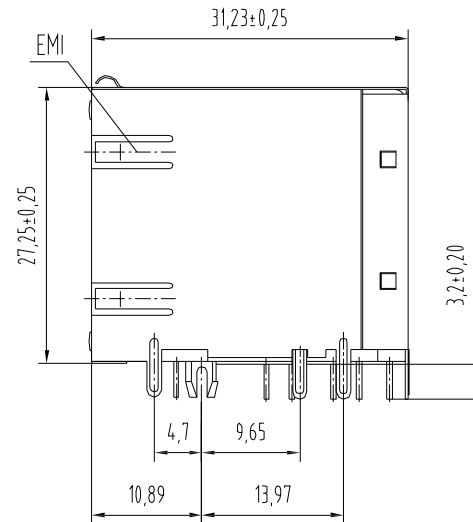
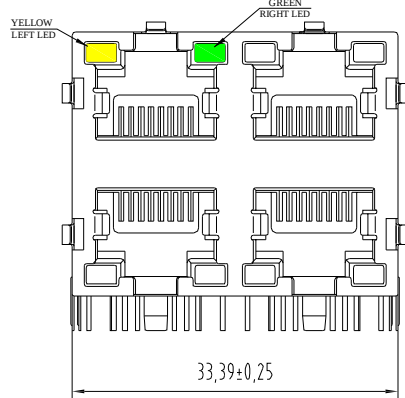


ROHS

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A			INITIAL EDITION	2016.06.28	AJ. Yang



LED SCHEMATIC:



NOTES:

ELECTRICAL:

- VOLTAGE RATING :125 VAC RMS.
- CURRENT RATING :1.5 AMP.
- CONTACT RESISTANCE :30 MILLIOHMS MAX.
- INSULATION RESISTANCE :500 MEGOHMS MIN @500V DC.
- DIELECTRIC STRENGTH :1000V AC RMS 50Hz. 1MIN .
- LED RATINGS:FORWARD VOLTAGE :2.2 VOLTS TYPICAL.
REVERSE VOLTAGE :5 VOLTS MAXIMUM.

MATERIAL:

- HOUSING MATERIAL :LEAD FREE POLYESTER UL94V-0.
- CONTACT MATERIAL :PHOSPHOP BRONZE T=0.45mm
FLAT PIN OR ø0.46mm ROUND PIN.
- PLATING :GOLD PLATING OVER NICKEL. GOLD
PLATING THICKNESS 1u"/3u"/6u"/15u"/30u"/50u"
- SHIELDING :0.20mm THICKNESS COPPER ALLOY
WITH NICKEL PLATED.



MECHANICAL:

- OPERATING :750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER :1 LB MIN

ENVIRONMENTAL:

- Temperature Range: -40℃T0~+85℃
- Relative Humidity: 90~95% (40±2℃)

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

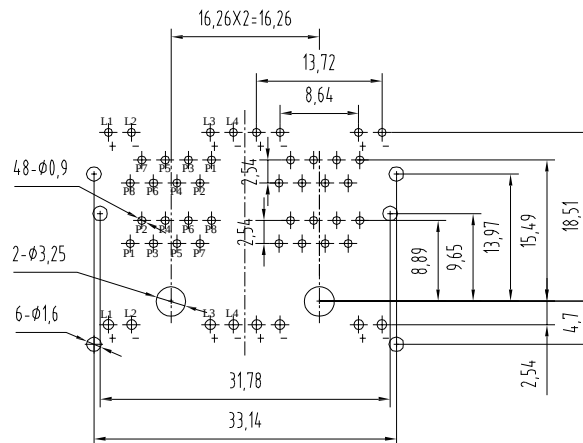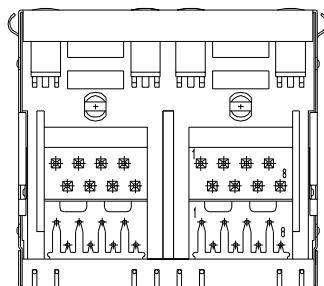

PC Board Layout
Component Side Shown



UNIT: mm [inch]

TOLERANCE:

X.X ±0.35
X.XX ±0.25
X.XXX ±0.15
Angle ±3.0°

SCALE:1:1 SIZE:A4

YUEQING ZHUSUN ELECTRONIC CO.,LTD

DESIGN:

AJ. Yang 2016.06.28

CHECKED:

YK. Zhang 2016.07.10

APPROVED:

SJ. Li 2016.07.28

TITLE: RJ45 Connector 2x2 Multi-Port
8P8C With Led Y&G Module Jack

PART NO.

ZE31222DD

DRAW NO.

ZSZ-618-A

SHEET NO.

1/1