


1Port RJ45 Connector HQST-G1159A01A-GY



Features:

- ROHS Compliant (pb free)
- Meets or exceeds IEEE802.3 standards including 350uH Min OCL with 8mADC
- High performance for EMI suppression , Crosstalk, Return loss and Consistent Electrical
- Minimun 1500Vrms isalation per IEEE802.3 requirement
- Minimize PCB space and Simplify PCB Layout
- Less magnetic components to be placed on PCB, higher reliability and yields
- OPERATING TEMPERATURE: 0°C~+70°C
- STORAGE TEMPERATURE: -40°C~+85°C

Mechanical Dimensions:

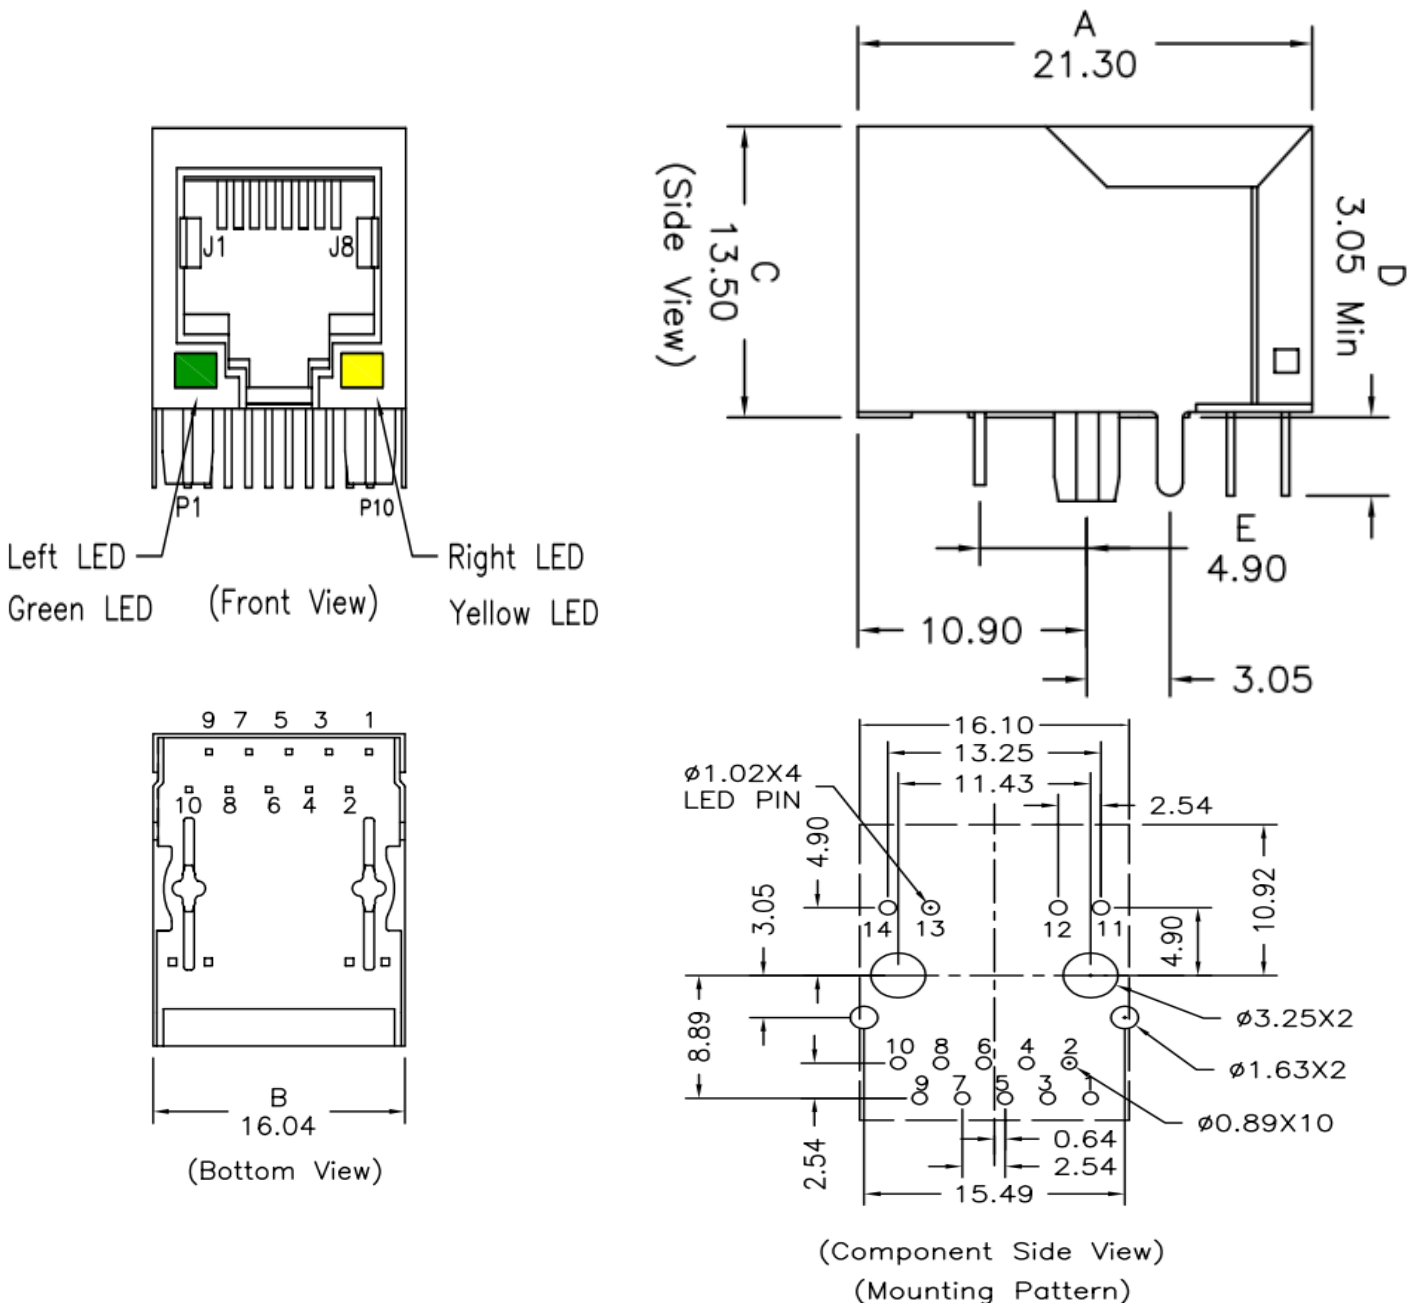


1Port RJ45 Connector

HQST-G1159A01A-GY



Electrical Specification@25° C Operating Temperature 0 to +70° C							
Part NO	OCL primary@100KHz 0.1Vms 8mA	Leakage primary@10KHz 0.1Vms	LED Specification				
			Standard LED	Wavelength	Forward V(Min/Max)	Forward A	Type
G1159A01A-GY	350uH Min	0.5uH max	Green	568nm	1.8v/2.8v	20mA	squareness
			Yellow	585nm	1.8v/2.8v	20mA	squareness

Electrical Specification@25° C Operating Temperature 0 to +70° C									
Part NO	Insertion loss(dB max) 1-100MHz	Return Loss(db min)MHz				DMRR(dB min)MHz		Crosstalk(dB min)MHz	Isolation Voltage(Chip side to UTP)
		1-30	40	50	60-100	1-60	60-100		
G1159A01A-GY	-1.2	-18	-18	-16	-12	-50	-50	-30	1500V/AC

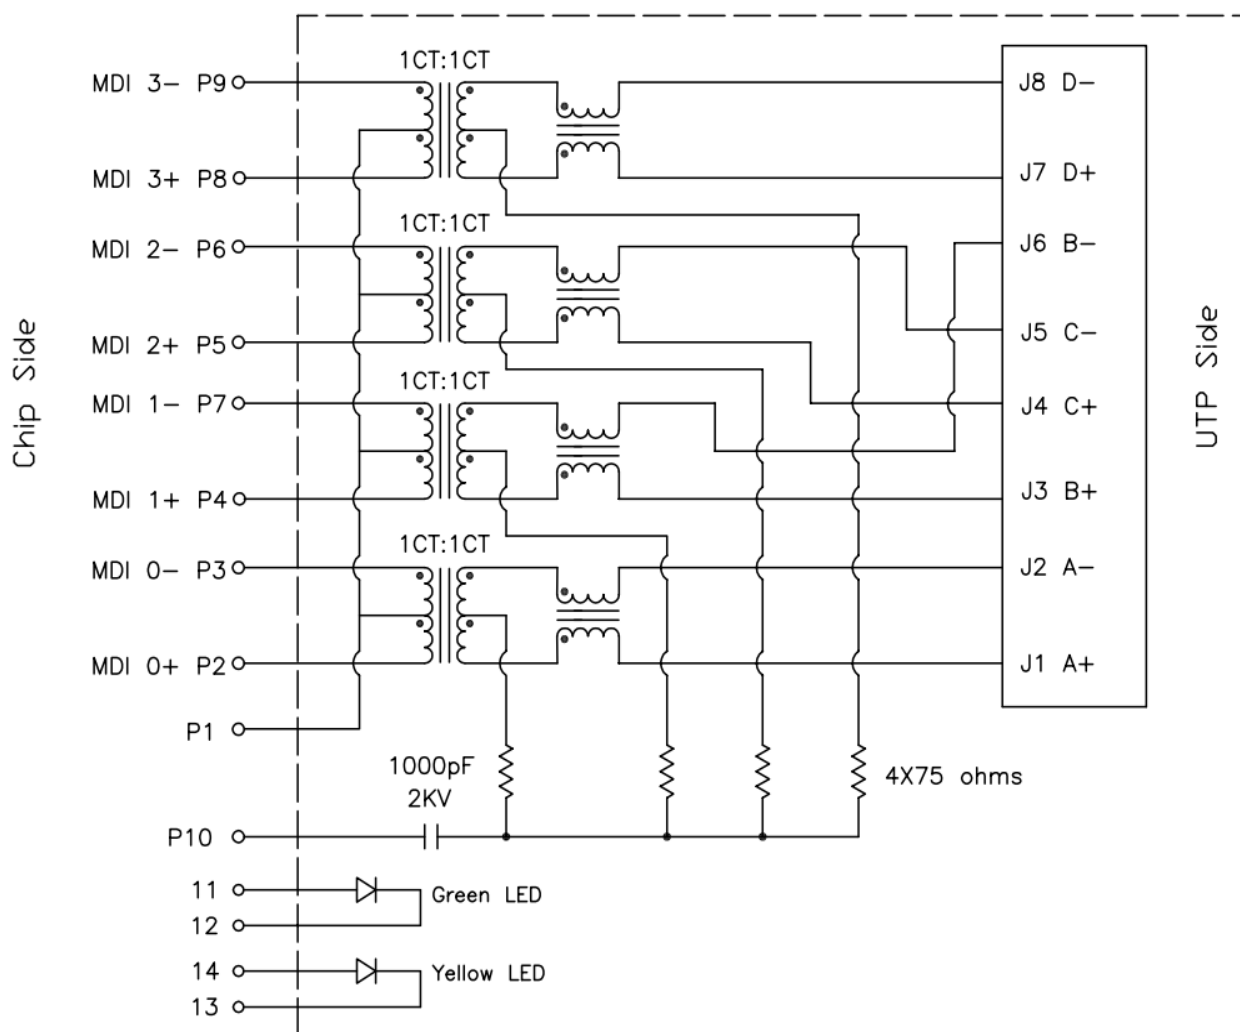

HQST ELECTRONICS CO., LTD.

<https://shop104373926.taobao.com/>
石门盈盛电子科技有限公司

TEL: 18673625585 18673625805
www.wangluobianyaqi.cn
E-mail:hqst008@163.com