

1*4Port RJ45 Connector

HQST-E1459A01A-YG



ELECTRICAL:


- | | |
|-------------------------|-------------------------------|
| 1.VOLTAGE RATING: | 125VAC RMS |
| 2.CURRENT RATING: | 1.5 AMP |
| 3.CONTACT RESISTANCE | 30 MILLIOHMS MAX |
| 4.INSULATION RESISTANCE | 500 MEGOHMS MIN @ 500 VDC |
| 5.DIELECTRIC STRENGTH | 1000VAC RMS 50HZ OR 60HZ 1MIN |

MECHANICAL:

- | | |
|--------------------------|--|
| 1.HOUSING & INSERT MATER | GLASS FILLED PA66(UL94V-0) |
| 2.CONTACT MATERIAL | DIAMETER 0.46MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL |
| 3.SHIELD | 0.20~0.25MM THICKNESS BRASS WITH TIN PLATED |
| 4.MATING/UNMATING FORCE | 2.2KG.F MAX |
| 5.RETENTION STRENGTH | 7.7KG.F MIN BETWEEN JACK AND PLUG |
| 6.OPERATING LIFE | 600 CYCLES MIN |

ENVIRONMENTAL:

- | | |
|-------------|----------------------------------|
| 1.STORAGE | -40℃~+85℃ RELATIVE HUMIDITY <70% |
| 2.OPERATION | -40℃~+70℃ |

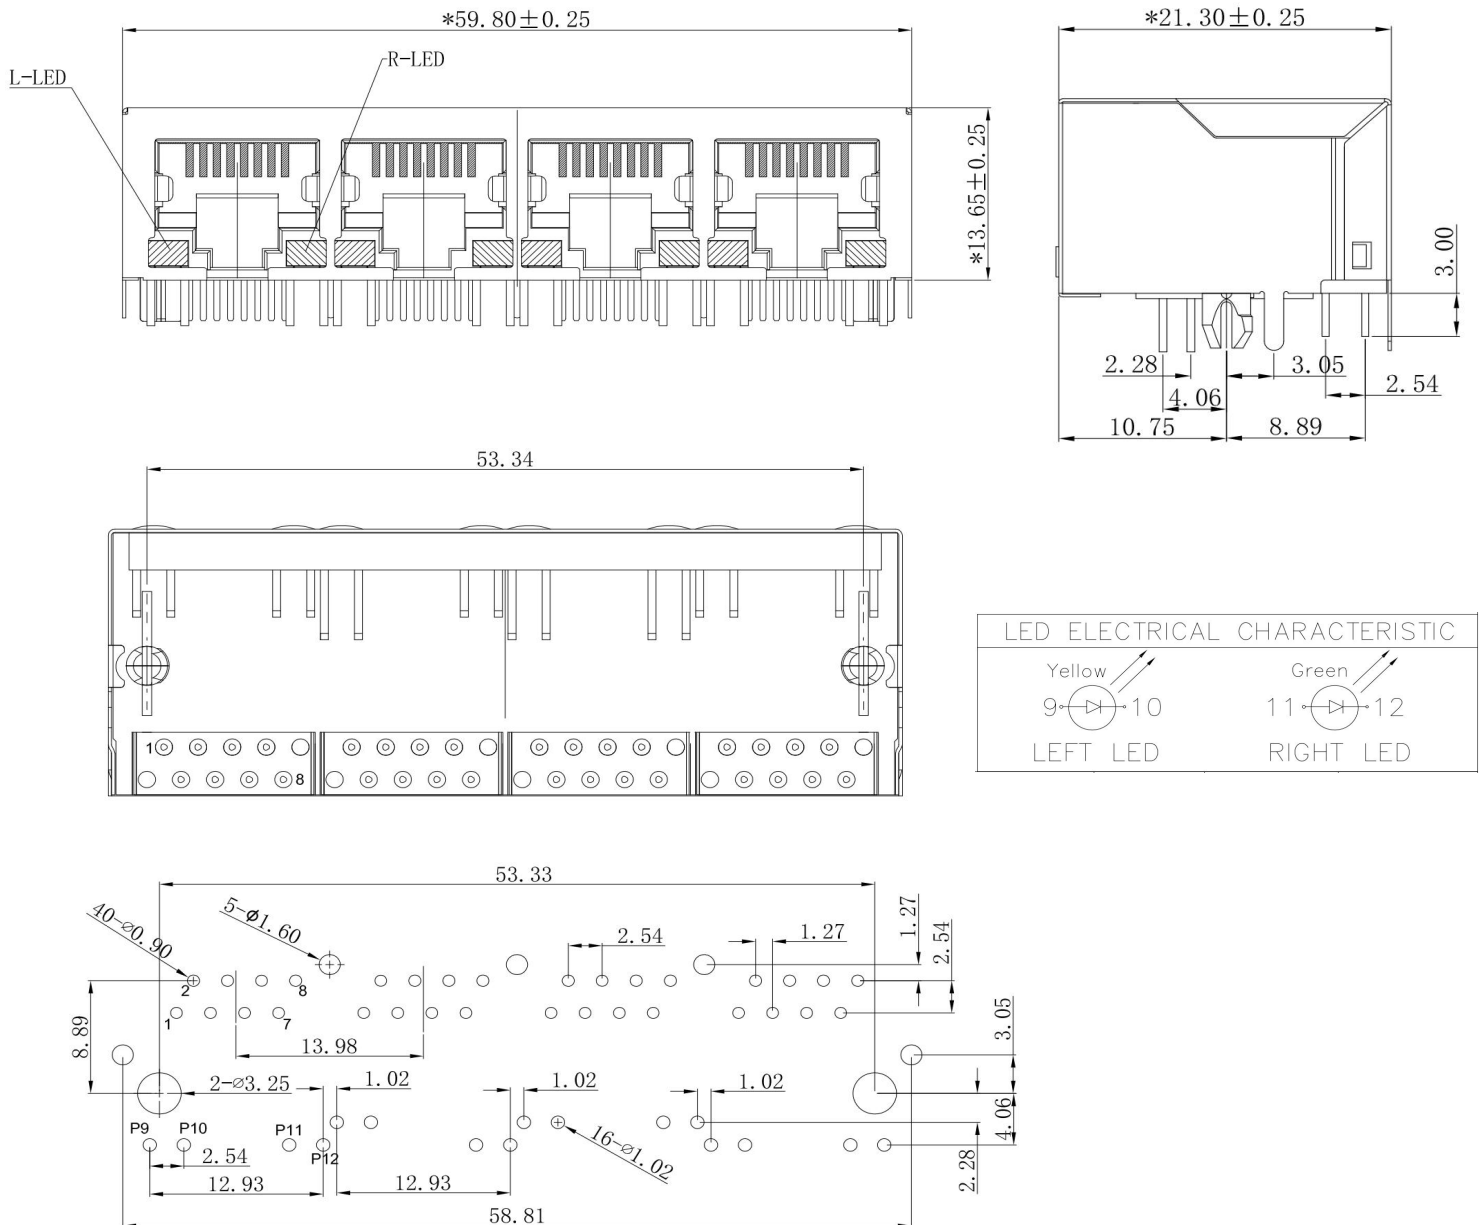

HQST ELECTRONICS CO., LTD.

<https://shop104373926.taobao.com/>

湖南石门盈盛电子科技有限公司

TEL:18673625585 13302925516

QQ: 278894196 229197143

E-mail:shengzhongting@hotmail.com