

1Port RJ45 Connector

HQST-E1156A01A



ELECTRICAL:



- 1.VOLTAGE RATING: 125VAC
- 2.CURRENT RATING: 1.5 AMP
- 3.CONTACT RESISTANCE: 30 MILLIOHMS MAX
- 4.INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC
- 5.DIELECTRIC STRENGTH: 1000VAC RMS 50HZ OR 60HZ 1MIN

MECHANICAL:

- 1.HOUSING & INSERT PBT UL94V-0
- 2.CONTACT MATERIAL: DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER
- 3.SHIELD: 0.20~0.25MM THICKNESS BRASS WITH TIN PLATED
- 4.MATING/UNMATING: 2.2KG.F MAX
- 5.RETENTION STRENGTH: 7.7KG.F MIN BETWEEN JACK AND PLUG
- 6.OPERATING LIFE: 600 CYCLES MIN

ENVIRONMENTAL:

1. STORAGE: -10°C~+40°C RELATIVE HUMIDITY <70%
2. OPERATION: -40°C~+70°C

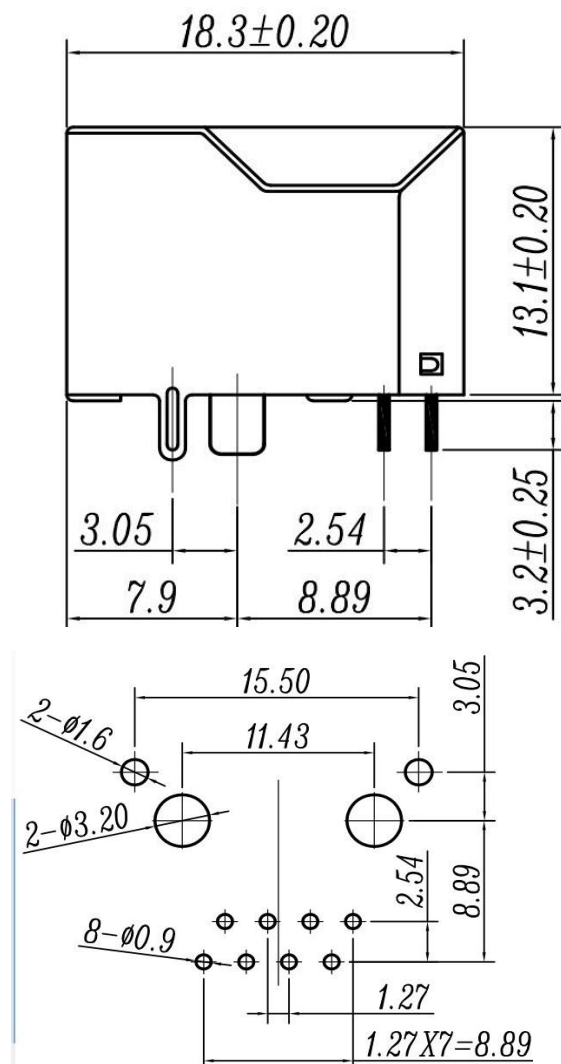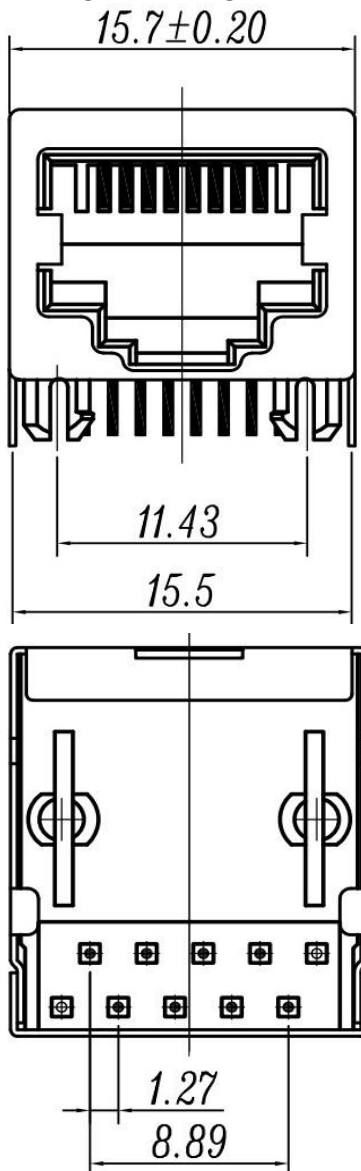

PC Board Layout
Top View

HQST ELECTRONICS CO., LTD.

<https://shop104373926.taobao.com/>

石门盈盛电子科技有限公司

TEL: 0755-21083343 18673625585

www.wangluobianyaqi.cn

E-mail: hqst008@163.com